


MB332 PCB Terminal Block, Modular / Single Mold




MB


| DIMENSIONS/POSITIONS | | MB332-350M | MB332-381 |
|----------------------|-------------------------|--------------------------|--------------------------|
| 間距 | Pitch | 3.50mm | 3.81mm |
| 位數 | Poles | 2 ~ 3Poles | 2 ~ 24Poles |
| 塑膠本體 | Housing Material | PA 66 | PA 66 |
| 壓線圈 | Cage Clamp | Brass, Ni Plated | Brass, Ni Plated |
| 端子 | Contact | Brass, Tin Plated | Brass, Tin Plated |
| 螺紋 | Screw Thread | M2.0, Steel, Zinc Plated | M2.0, Steel, Zinc Plated |
| 電線線徑 | Wire Size | 16 ~ 26AWG | 16 ~ 26AWG |
| 剝線長度 | Wire Strip Length | 5mm | 5mm |
| PCB孔徑 | PCB Hole Diameter | 1.3mm | 1.3mm |
| 最大緊固扭矩 | Tightening Torque, Max. | 1.5 Lb-in | 3.0 Lb-in |
| 環境作業溫度 | Operating Temperature | -40°C to +105°C | -40°C to +105°C |

TECHNICAL DATA

| | | | |
|---|--------------------------------|--------------------|--------------------|
| 連接符合標準 Connection in acc. with standard EN-VDE | | | |
| 額定電流 I _n | Nominal Current I _n | 10A | 8A |
| 額定橫截面 | Nominal Cross Section | 1.5mm ² | 1.5mm ² |
| 最大負載電流 | Maximum load current | 10A | 8A |
| 絕緣材料 | Insulating Material | PA | PA |
| 阻燃等級,符合UL94 Inflammability class acc. to UL94 | | V0 | V0 |
| 額定電壓,UL/CUL Nominal voltage, UL/CUL | | 300V | 300V |
| 額定電流,UL/CUL Nominal current, UL/CUL | | 10A | 8A |

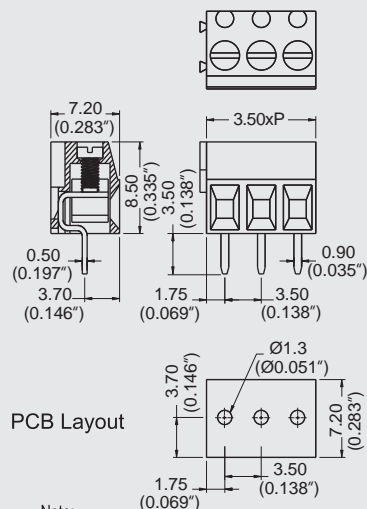

Note:
Screw Plating: Changes are available upon request

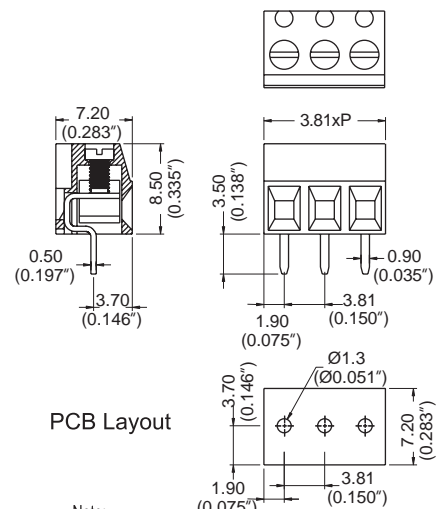

Note:
Screw Plating: Changes are available upon request