




MF204 Connector



ME204-381



ME204-508

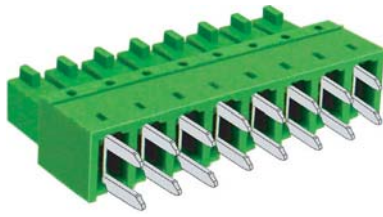

DIMENSIONS/POSITIONS

| DIMENSIONS/POSITIONS | | MF204-381 | MF204-508 |
|----------------------|-----------------------|-----------------------------|-----------------------------|
| 間距 | Pitch | 3.81mm | 5.08mm |
| 位數 | Poles | 2 ~ 24Poles | 2 ~ 24Poles |
| 塑膠本體 | Housing Material | PA 66 | PA 66 |
| 夾片 | Wire Protector | Phosphor Bronze, Tin Plated | Phosphor Bronze, Tin Plated |
| PCB孔徑 | PCB Hole Diameter | 1.6mm | 1.4mm |
| 環境作業溫度 | Operating Temperature | -40°C to +105°C | -40°C to +105°C |

TECHNICAL DATA

| | | | |
|---|-----------------------|------|------|
| 連接符合標準 Connection in acc. with standard EN-VDE | | | |
| 額定電流 I_n | Nominal Current I_n | 7A | 11A |
| 額定橫截面 | Nominal Cross Section | - | - |
| 最大負載電流 | Maximum load current | 7A | 11A |
| 絕緣材料 | Insulating Material | PA | PA |
| 阻燃等級,符合UL94 Inflammability class acc. to UL94 | | V0 | V0 |
| 額定電壓,UL/CUL Nominal voltage, UL/CUL | | 300V | 300V |
| 額定電流,UL/CUL Nominal current, UL/CUL | | 7A | 11A |

