


MPC521 PCB Connector




DIMENSIONS/POSITIONS

MPC521-508

間距	Pitch	5.08mm
位數	Poles	2 ~ 12Poles
塑膠本體	Housing Material	PA 66
壓線圈	Cage Clamp	Copper, Tin Plated
端子	Contact	Stainless Strip Steel
螺紋	Screw Thread	M2.0, Steel, Zinc Plated
電線線徑	Wire Size	12 ~ 30AWG
剝線長度	Wire Strip Length	10mm
最大緊固扭矩	Tightening Torque, Max.	5.31 Lb-in
環境作業溫度	Operating Temperature	-40°C to +105°C

TECHNICAL DATA

連接符合標準 Connection in acc. with standard EN-VDE		
額定電流 I _n Nominal Current I _n		16A
額定橫截面 Nominal Cross Section		2.5mm ²
最大負載電流 Maximum load current		16A
絕緣材料 Insulating Material		PA
阻燃等級,符合UL94 Inflammability class acc. to UL94		V0
額定電壓,UL/CUL Nominal voltage, UL/CUL		300V
額定電流,UL/CUL Nominal current, UL/CUL		16A

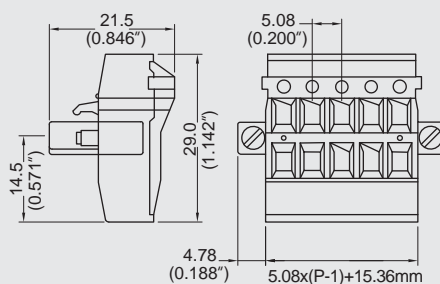

MPC