


## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

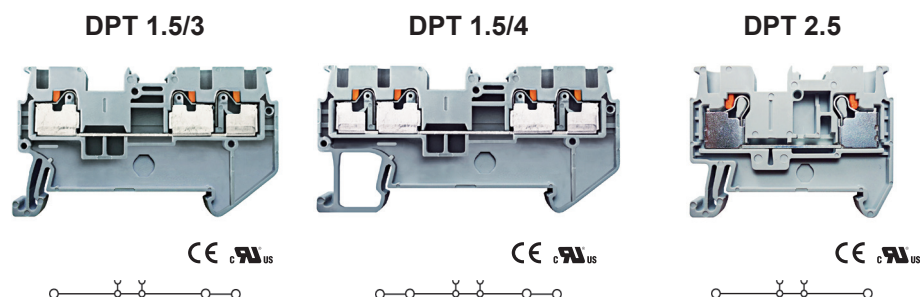

Specifications (產品規格)	1.5mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12
<b>CSA</b>	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12
<b>IEC</b>	500V / 17.5A / 0.14-1.5mm <sup>2</sup>	500V / 17.5A / 0.14-1.5mm <sup>2</sup>	800V / 24A / 0.14-2.5mm <sup>2</sup>
<b>Insulating impulse voltage withstand / Pollution degree</b> (額定衝擊電壓 / 汙染等級)	6KV / 3	6KV / 3	8KV / 3
<b>Insulation stripping length (mm)</b> (剝線長度)	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	3.5 x 54.1 x 32	3.5 x 63.2 x 32	5.2 x 48.5 x 36.5
For TS35x 15	3.5 x 54.1 x 39.5	3.5 x 63.2 x 39.5	5.2 x 48.5 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT1.5/3-D    50	DD-PT1.5/4-D    50	DD-PT2.5-D    50
<b>Comb Link (邊接式聯接件)</b>	ODFBS2-3.5    50 ODFBS3-3.5    50 ODFBS4-3.5    50 ODFBS5-3.5    50 ODFBS10-3.5    10	ODFBS2-3.5    50 ODFBS3-3.5    50 ODFBS4-3.5    50 ODFBS5-3.5    50 ODFBS10-3.5    10	ODFBS2-5    50 ODFBS3-5    50 ODFBS4-5    50 ODFBS5-5    50 ODFBS10-5    10
<b>Marking Tags (標記號)</b>	DUC-TMF3.5    10 (側面 144 位) DUC-TM3.5    10 (正面 144 位)	DUC-TMF3.5    10 (側面 144 位) DUC-TM3.5    10 (正面 144 位)	DUC-TMF5    10 (側面 96 位) DUC-TM5    10 (正面 96 位)
<b>Tool (工具)</b>	DS2 (0.4 x 2.0mm)	DS2 (0.4 x 2.0mm)	DS3 (0.4*3.5mm)